



Please write clearly in block capitals.

Centre number

Candidate number

Surname \_\_\_\_\_

Forename(s) \_\_\_\_\_

Candidate signature \_\_\_\_\_

I declare this is my own work.

# A-level PHYSICS

## Paper 3 Section A

Monday 17 June 2024

Morning

Time allowed: The total time for both sections of this paper is 2 hours. You are advised to spend approximately 70 minutes on this section.

### Materials

For this paper you must have:

- a pencil and a ruler
- a scientific calculator
- a Data and Formulae Booklet
- a protractor.

### Instructions

- Use black ink or black ball-point pen.
- Fill in the boxes at the top of this page.
- Answer **all** questions.
- You must answer the questions in the spaces provided. Do not write outside the box around each page or on blank pages.
- If you need extra space for your answer(s), use the lined pages at the end of this book. Write the question number against your answer(s).
- Do all rough work in this book. Cross through any work you do not want to be marked.
- Show all your working.

### Information

- The marks for questions are shown in brackets.
- The maximum mark for this paper is 45.
- You are expected to use a scientific calculator where appropriate.
- A Data and Formulae Booklet is provided as a loose insert.

For Examiner's Use	
Question	Mark
1	
2	
3	
<b>TOTAL</b>	



J U N 2 4 7 4 0 8 3 A 0 1

1B/M/Jun24/G4005/E9

**7408/3A**

**Section A**


Answer **all** questions in this section.

0	1
---	---

This question is based on a method to determine the resistivity of a wire (required practical activity 5).


**Figure 1** shows a micrometer screw gauge.

**Figure 1**

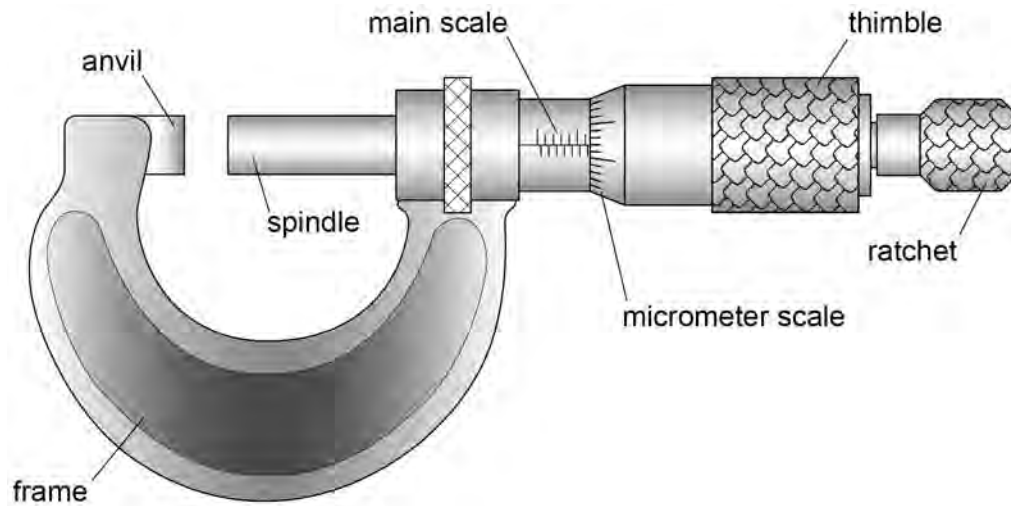

**Figure 2** shows an enlarged view of the scales.

**Figure 2**

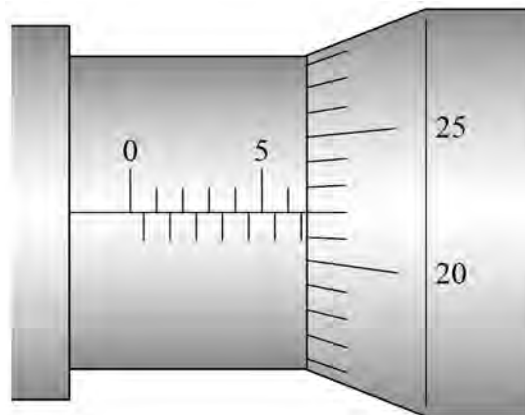

**0 1 . 1** State, in mm, the resolution of the main scale.

**[1 mark]**

resolution = \_\_\_\_\_ mm

**0 1 . 2** What is the reading on the micrometer?

Tick (✓) **one** box.

**[1 mark]**

6.22 mm

6.72 mm

6.78 mm

8.22 mm

**0 1 . 3** A wire **X** is placed in the gap between the anvil and the spindle.

State and explain how this gap is closed just before taking a reading of the diameter of **X**.

**[1 mark]**

---



---



---


**Question 1 continues on the next page**

**Turn over ►**



**Figure 3** shows a circuit used to determine the resistance per metre of wire **X**.


**Figure 3**

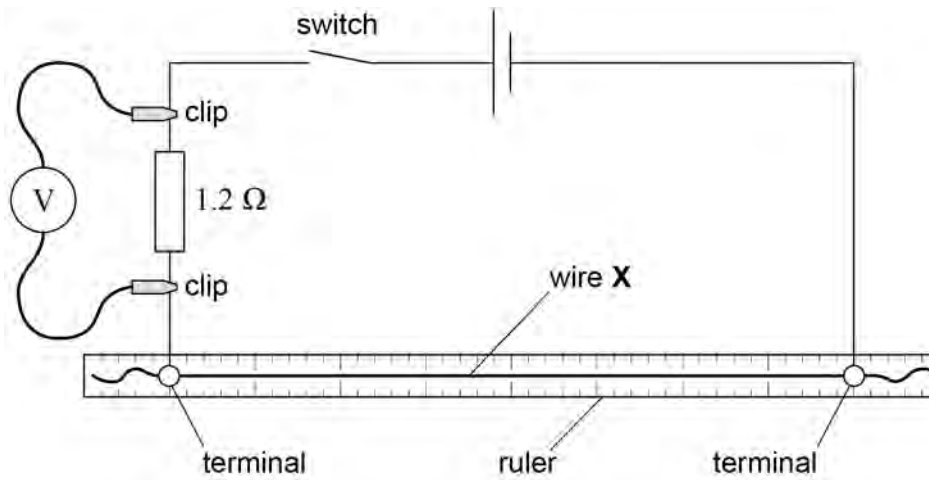

Two terminals are used to mount **X** on a ruler.  
Clips are used to connect a voltmeter across the  $1.2 \Omega$  resistor.  
When the switch is closed, the voltmeter reading is  $931 \text{ mV}$ .

The switch is then opened and the voltmeter is connected to **X** as shown in **Figure 4**.

**Figure 4**

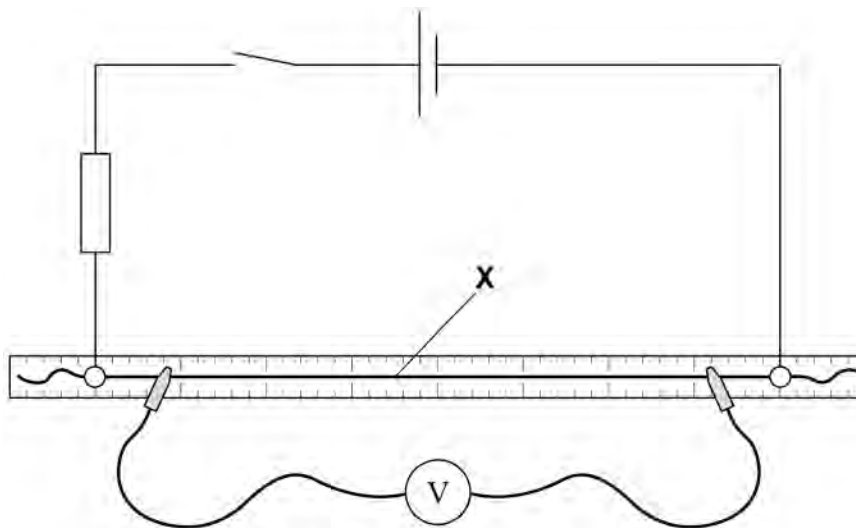

**0 1 . 4** When the switch is closed, the voltmeter reading is 397 mV.

Show that, for the arrangement in **Figure 4**, the resistance  $R$  of the wire between the clips is about  $0.5 \Omega$ .

**[2 marks]**


Question 1 continues on the next page

Turn over ►



The length of wire between the clips is  $L$ .  
Values of  $R$  are determined for different values of  $L$ .  
**Figure 5** shows these data.

**Figure 5**

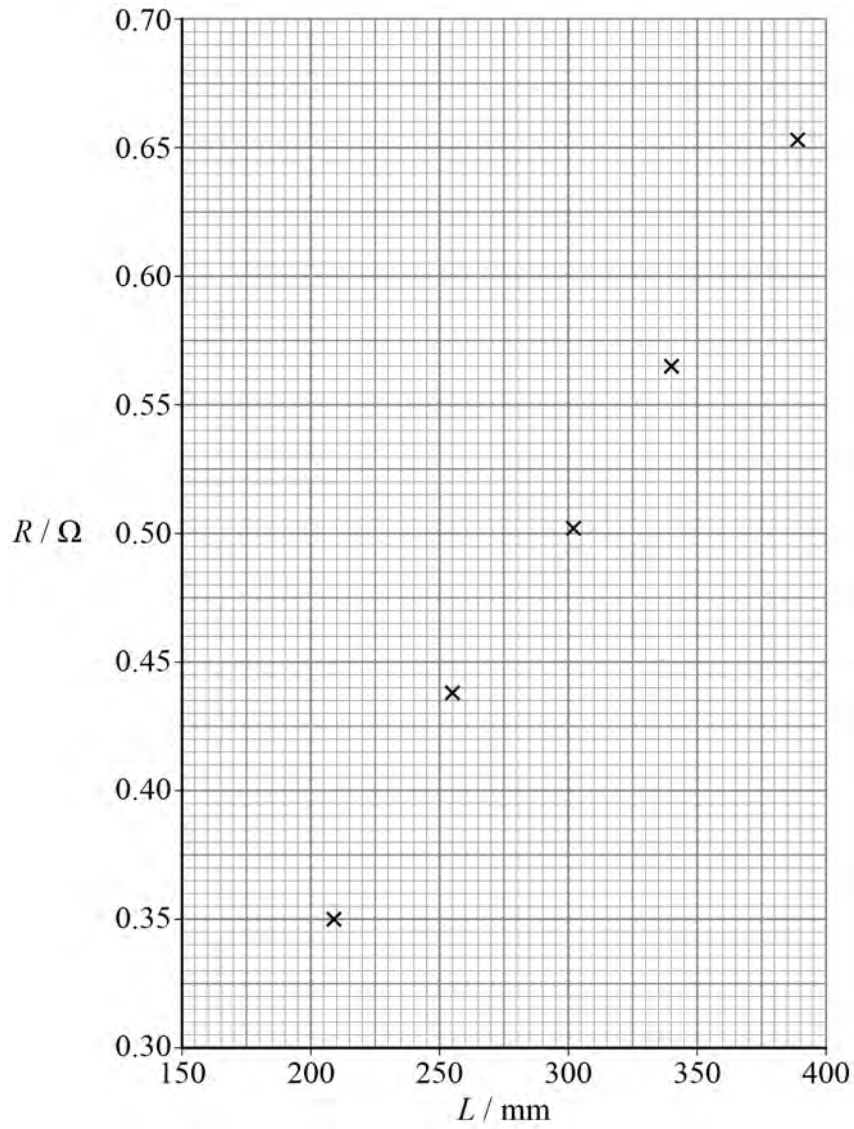

**0 1 . 5** Determine the resistance per metre of X.

**[2 marks]**

resistance per metre = \_\_\_\_\_  $\Omega \text{ m}^{-1}$



0 1 . 6

**Table 1** shows the resistance per metre of various metal wires.  
The diameter of **X** is one of the values of  $d$  shown in **Table 1**.

**Table 1**

$d / \text{mm}$	Resistance per metre of wire / $\Omega \text{ m}^{-1}$			
	copper	tungsten	alumel	nichrome
0.38	0.151	0.504	3.15	9.73
0.93	0.0247	0.0824	0.515	1.59
1.63	0.00805	0.0268	0.168	0.518
2.08	0.00494	0.0165	0.103	0.318
3.66	0.00160	0.00532	0.0333	0.103

Identify the metal used for **X**.  
Go on to determine the resistivity of the metal.  
State an appropriate SI unit for your answer.

**[4 marks]**metal used for **X** = \_\_\_\_\_

resistivity = \_\_\_\_\_ SI unit = \_\_\_\_\_

**Question 1 continues on the next page****Turn over ►**

**0 1 . 7** A student adds error bars for  $R$  and  $L$  to each point on **Figure 5**.

She estimates that

- each value of  $R$  has a percentage uncertainty of 6%
- each value of  $L$  has an absolute uncertainty of 5 mm.

Compare her error bars for the point at  $L = 209$  mm with her error bars for the point at  $L = 388$  mm.

**[2 marks]**

---

---

---

---

---

---

---



0 1 . 8

Outline how error bars are used to determine the uncertainty in the gradient of a linear graph.

**[2 marks]**

---

---

---

---

---

---

---

---

---

---

---


**15**

**Turn over for the next question**

**Turn over ►**

0 2

**Figure 6** shows apparatus used to investigate how the resistance  $R$  of a light-dependent resistor (LDR) varies with illumination.

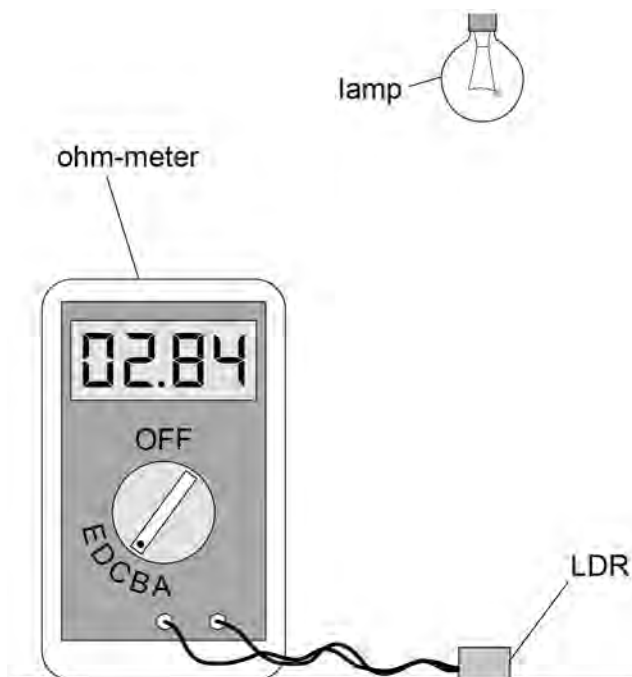**Figure 6**

The ohm-meter

- **always** displays a four-digit reading of  $R$
- can be set to the different ranges **A** to **E** shown in **Table 2**.

**Table 2**

Setting	Maximum reading displayed	Minimum (non-zero) reading displayed	Unit
range <b>A</b>	199.9	000.1	$\Omega$
range <b>B</b>	1999	0001	$\Omega$
range <b>C</b>	19.99	00.01	$k\Omega$
range <b>D</b>	199.9	000.1	$k\Omega$
range <b>E</b>	1.999	0.001	$M\Omega$



- 0 2 . 1** Explain why the reading displayed in **Figure 6** shows that the ohm-meter is set to range **C**.

[1 mark]

---

---

---

- 0 2 . 2** The quantity  $E_V$  is a measure of the intensity of the light incident on the LDR. The SI unit of  $E_V$  is the lux (lx).

The resistance  $R$  of the LDR is given by

$$\log(R / \Omega) = -0.772 \log(E_V / \text{lx}) + 5.09$$

Show that  $E_V$  for the arrangement shown in **Figure 6** is about 130 lx.

[2 marks]

Question 2 continues on the next page

Turn over ►




$R$  is recorded for different values of the vertical distance  $x$  between the lamp and the LDR.

$E_V$  is calculated for each value of  $R$ .

**Figure 7** shows how  $E_V$  varies with  $x$ .

**Figure 7**

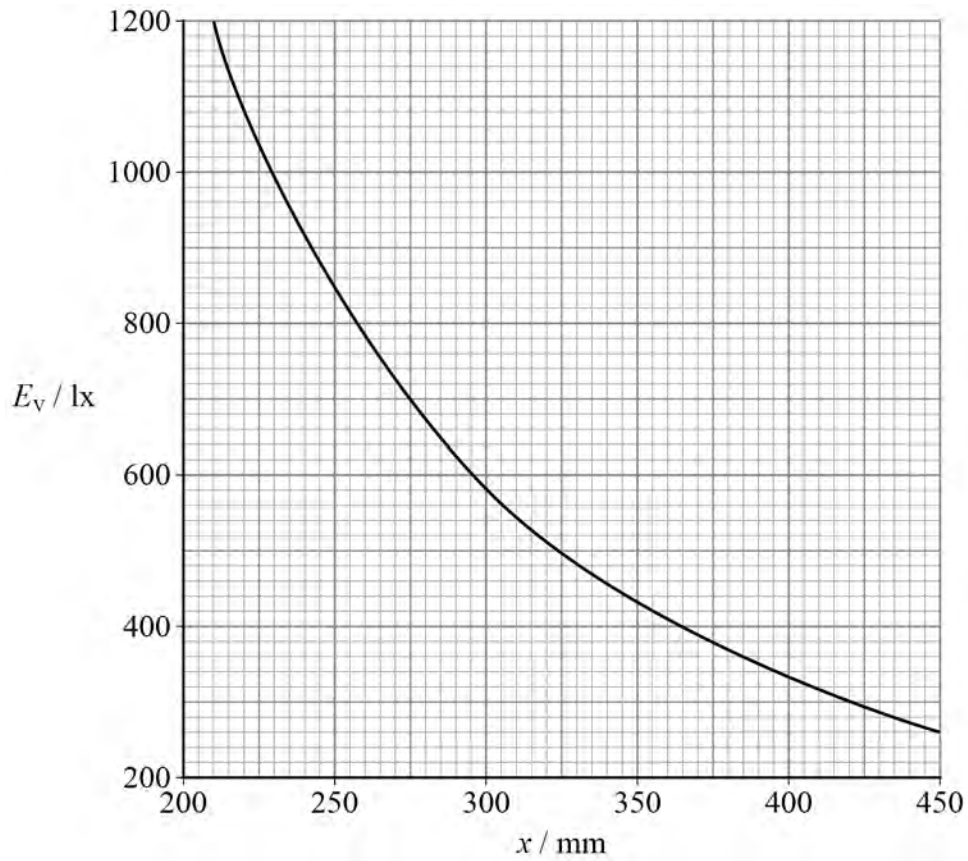

It can be shown that  $E_V \propto \frac{1}{x^2}$

0 2 . 3

Describe a method to show that **Figure 7** confirms this relationship.  
You do not need to show any calculations.

[2 marks]

---

---

---

---

---

---

---

---

---

---

0 2 . 4

Deduce the value of  $x$  when  $E_V = 130 \text{ lx}$ .

[2 marks]

$x =$  \_\_\_\_\_ mm

Question 2 continues on the next page

Turn over ►




0 2 . 5

$R$  is measured when  $x = 450$  mm.

**Figure 8** shows how the ohm-meter displays the values of  $R$  when set to range **B** and when set to range **C**.

**Figure 8**

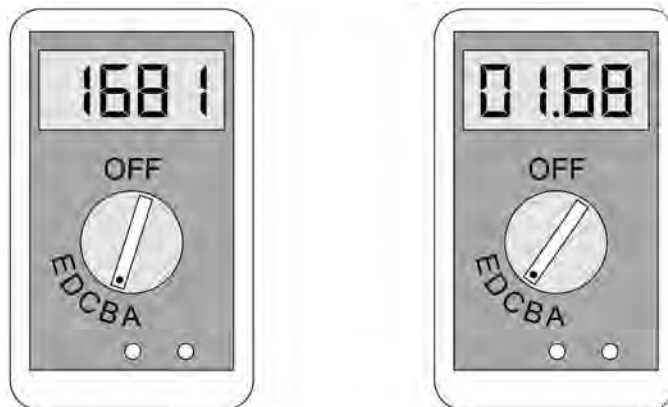

The uncertainty of the reading on the ohm-meter is  $\pm 2\%$  of the displayed reading plus  $\pm 2$  in the least significant digit.

This means that:

- using range **B** the **maximum** value of  $R$  is  $1.02 \times 1681 + 2 = 1717 \Omega$
- using range **C** the **minimum** value of  $R$  is  $0.98 \times 1.68 - 0.02 = 1.63 \text{ k}\Omega$ .



Complete **Table 3**.

Go on to explain whether range **B** or range **C** should be used to measure  $R$ .

[2 marks]

**Table 3**

Setting	Minimum $R$	Maximum $R$
range <b>B</b>	_____ $\Omega$	1717 $\Omega$
range <b>C</b>	1.63 k $\Omega$	_____ k $\Omega$

---

---

---

---

---

---

---


**Question 2 continues on the next page**

**Turn over ►**



**Figure 9** shows the LDR being used to investigate the transmission of light through glass slides.

**Figure 9**

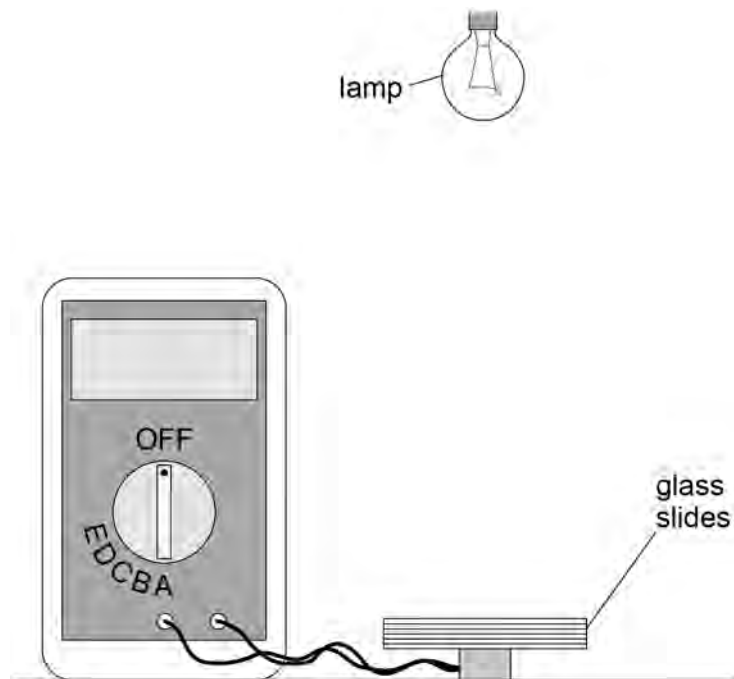

The lamp and ohm-meter are switched on.

$R$  is recorded with different numbers of slides placed on the LDR.

$E_V$  is calculated for each value of  $R$ .

0 2 . 6

The positions of the lamp and the LDR are not changed during the experiment.

Identify **two** other control variables.

**[2 marks]**

1 \_\_\_\_\_

\_\_\_\_\_

2 \_\_\_\_\_

\_\_\_\_\_



**0 2 . 7** For the arrangement in **Figure 9** it can be shown that

$$E_V = 400 e^{-\mu N}$$

where  $N$  is the number of slides  
 $\mu$  is a constant.

Explain how  $\mu$  can be determined from a linear graph.

**[2 marks]**

---



---



---



---



---



---

**0 2 . 8** In an experiment  $\mu = 9.0 \times 10^{-2}$

Deduce the minimum number of slides needed to reduce  $E_V$  by 50%.

**[2 marks]**

number of slides = \_\_\_\_\_

15

Turn over ►




**0 3**

This question is about a method to investigate how the force on a conductor varies with flux density and current (required practical activity 10).

**Figure 10** shows a copper rod clamped above a horizontal bench.

**Figure 10**

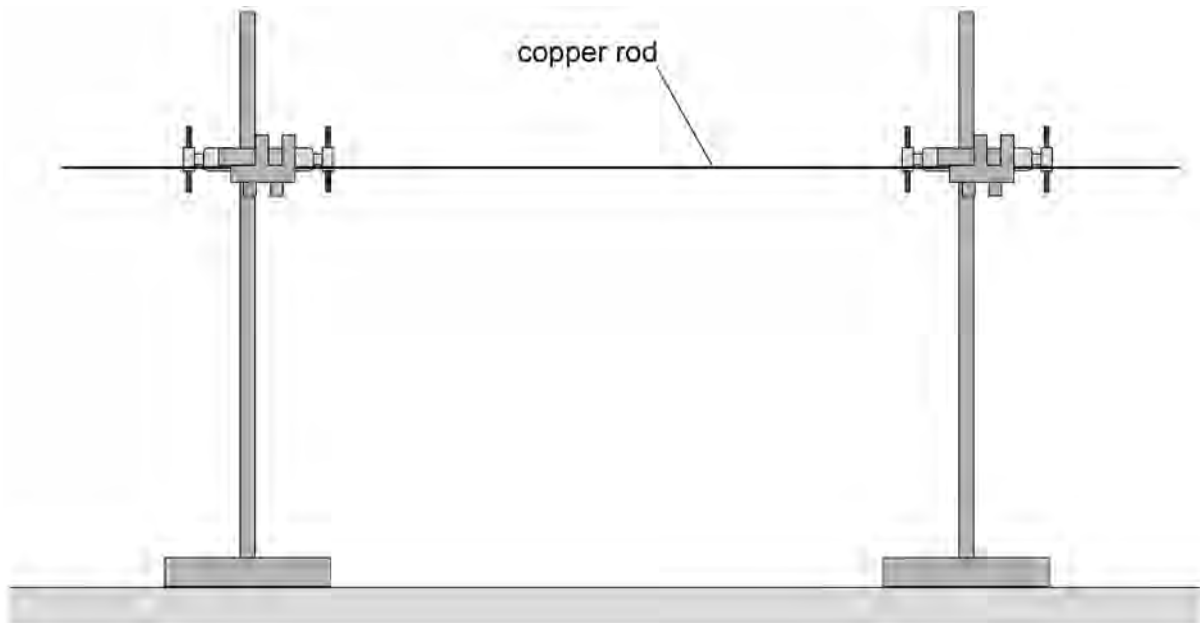



**Figure 11** shows the copper rod positioned above a digital balance.


Two identical magnets are mounted on a steel yoke with their opposite poles facing each other.

The balance is zeroed.

The yoke is then placed on the balance so that a horizontal uniform magnetic field is applied perpendicular to the copper rod.

The ends of the rod are connected as shown.

**Figure 11**

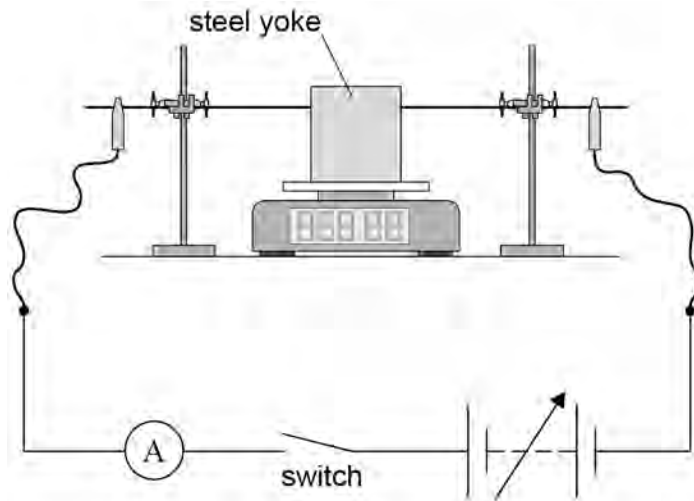

0 3 . 2

When the switch is open, the reading on the balance shows the mass of the yoke and the two magnets.

When the switch is closed, the reading on the balance decreases.

Explain, with reference to **Figure 11**, the direction of the horizontal magnetic field.

**[3 marks]**

---



---



---



---



---



---



The current  $I$  in the rod is varied.


The balance reading  $M_1$  is recorded for different values of  $I$ .

The switch is now opened.

Two additional magnets, identical to those used before, are attached to the yoke.

**Figure 12** shows how this new arrangement compares with the arrangement in **Figure 11**.

**Figure 12**

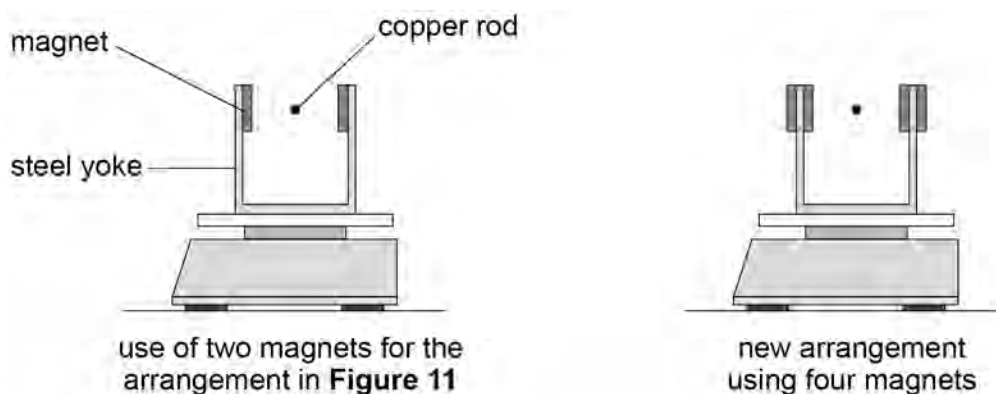

The balance reading with four magnets attached to the yoke is  $M_2$ .

With the switch open,  $M_2$  is the mass of the yoke and the four magnets.

The switch is now closed.

$M_2$  is recorded for different values of  $I$ .


**Question 3 continues on the next page**

Turn over ►



**Figure 13** shows data from both experiments.  
Values of  $M_1$  and  $M_2$  are plotted using different vertical axes.

**Figure 13**

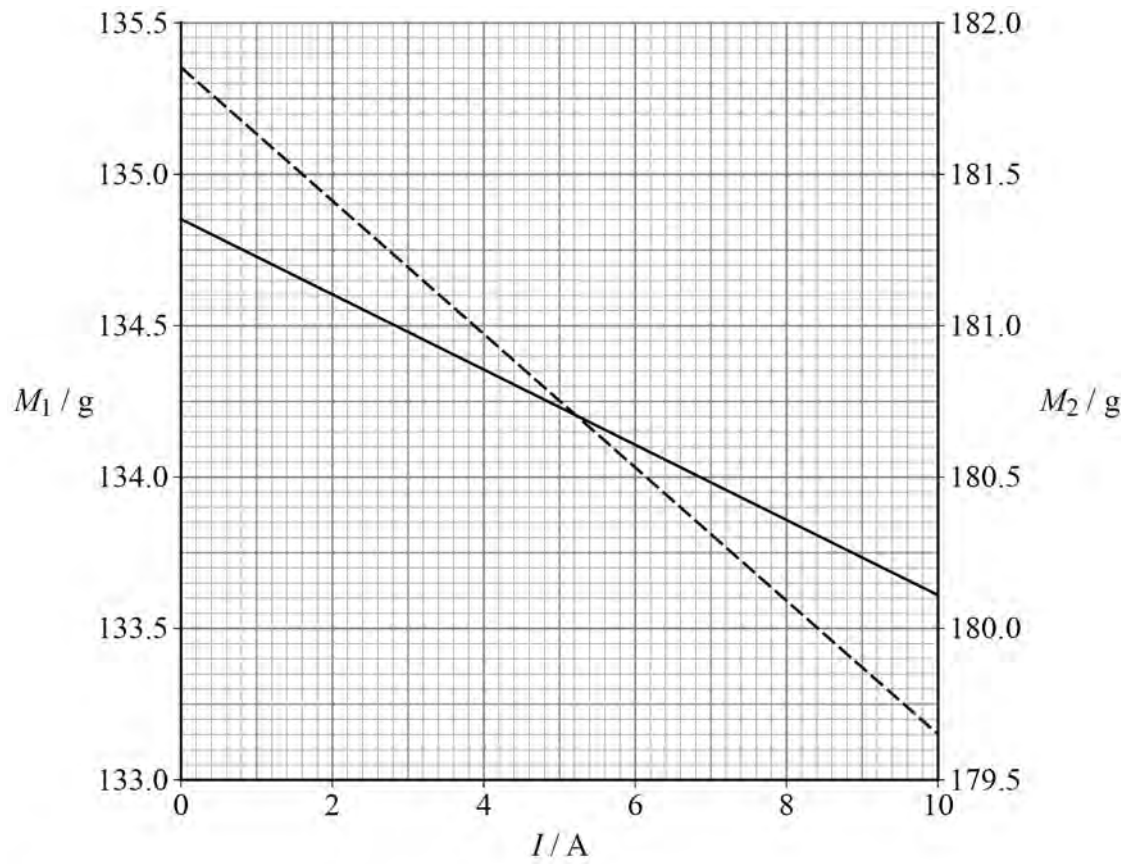

The solid line ——— shows the variation of  $M_1$  with  $I$

The dashed line - - - - - shows the variation of  $M_2$  with  $I$



It can be shown that

$$M = kBI + nZ + Y$$

where

$M$  = balance reading when the current is  $I$

$B$  = magnetic flux density of the horizontal uniform magnetic field

$n$  = number of magnets attached to the yoke

$Z$  = mass, in g, of each magnet

$Y$  = mass, in g, of the yoke

$k$  is a constant.

**0 3 . 3** Deduce the fundamental base units for  $k$ .

**[3 marks]**

fundamental base units = \_\_\_\_\_

**0 3 . 4** Determine  $Y$ .

**[3 marks]**

$Y =$  \_\_\_\_\_ g

**Question 3 continues on the next page**

**Turn over ►**





**There are no questions printed on this page**

*Do not write  
outside the  
box*

**DO NOT WRITE ON THIS PAGE  
ANSWER IN THE SPACES PROVIDED**







